


Features:

- Unique patented design
- 113dB sensitivity 1W/1m
- 800 Hz Crossover
- Extended high frequency response up to 20 kHz
- Small size and low weight
- 44.4 mm sandwich in- and outside voice coil

BMS 4550 is a powerful 1" professional compression driver that delivers outstanding sonic quality in a small package. It has an exceptional dynamic range and produces even the most complex music signals with depth and definition. The BMS exclusive voice coil technology employs a light weight Copper Clad Aluminium wire wound inside and outside of the Kapton™ former to improve the heat dissipation, dramatically increasing the acoustic output and reliability of the driver while minimising the power compression. The BMS 4550 - 1" compression driver is designed for a wide variety of applications in high quality, high power professional reinforcement systems and stage monitors where low crossover frequency is needed.

BMS 4550, CD 90/75 Horn, SPL 1W / 1m

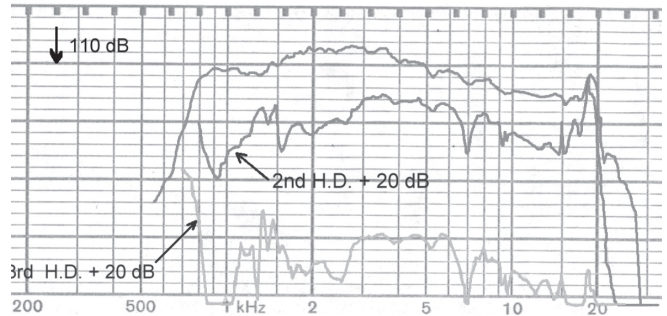


SPECIFICATIONS

Throat diameter	1" (25.4 mm)
Nominal impedance	8 or 16 Ohm
Power capacity (AES)	80 W
Peak Power	450 W

Sensitivity	
CD Horn 90° x75°, 1W/1m	113 dB
Plane wave tube, 1mW	117 dB
Maximal SPL (cont.)	132 dB at 80 W
Frequency range	500 - 20000 Hz
Recommended crossover	800 Hz
Voice coil diameter	1.75" (44.4 mm)
Magnet material	Ferrite
Flux density (Tesla)	2.0
Voice coil material	Copper Clad Aluminum
Voice coil former	Kapton™
Diaphragm material	Polyester

MOUNTING INFORMATION		
Overall diameter	mm	123
Depth	mm	52
Net weight	kg	2.25
2x M6 holes, 180° on 76.2 mm diameter		

BMS 4550, CD 90/75 Horn, SPL 1W / 1m

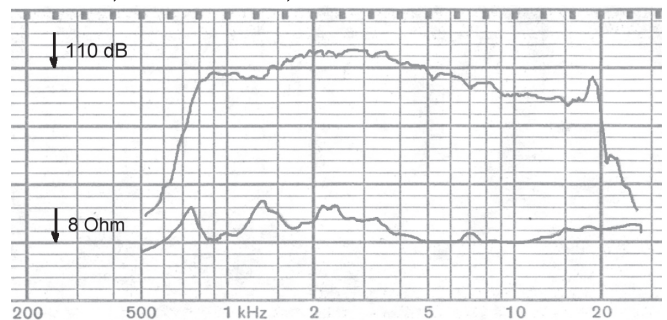

BMS 4550, CD 90/75 Horn, SPL 10W / 1m

